

VP-50MX

50 MEGAPIXEL THERMOELECTRIC PELTIER COOLED CAMERA



The VP-50MX, the latest member of the industrial proven VP series, is a 50 megapixel resolution CMOS camera with the CoaXPress interface. The VP-50MX uses the latest 50 megapixel CMOS image sensor (CMV50000) technology from AMS CMOSIS, and offers up to 30.9 frames per second at 7920 × 6004 resolution. This camera uses thermo-electric Peltier (TEC) cooling technology developed for, and used by, many demanding medical market customers. The TEC maintains the operating temperature of the CMOS image sensor at up to about 12 degrees below ambient temperature. This camera provides a stable operating condition or the ability to expose for a long period of time to increase camera sensitivity. Featured with the stable operating capability and high resolution, this camera is ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VIEWWORKS

Please Contact Vision Systems Technology, A Viewworks Master Distributor North America
www.visionsystech.com - 858.449.1562 - sales@visionsystech.com - [skype:visionsystech](https://www.skype.com/en/contacts/visionsystech)

VP-50MX

50 MEGAPIXEL THERMOELECTRIC PELTIER COOLED CAMERA

Main Features

- * 50 Megapixel Resolution (AMS CMOSIS)
- * Thermoelectric Peltier Cooling
 - about 12 degrees below ambient temperature
- * Minimizing the number of hot pixels with TEC
- * CoaXPress Interface up to 30 fps at 25 Gbps using 4 CH
- * Pixel Defect Correction
- * Flat Field Correction
- * DSNU and PRNU Correction

Applications

- * Flat Panel Display Inspection
- * PCB Inspection
- * Machine Vision Inspection
- * Microscopy and Metrology


Specifications

Model		VP-50MX-M/C 30		
Resolution (H × V)		7920 × 6004		
Sensor		AMS CMOSIS CMV 50000		
Sensor Size (Optical Diagonal)		35 mm (45.72 mm)		
Sensor Type		High Speed CMOS Image Sensor		
Pixel Size		4.6 μm × 4.6 μm		
Interface		CoaXPress		
Max. Frame Rate		1CH: 7.7 fps @ 6.25 Gbps	2CH: 15.5 fps @ 6.25 Gbps	4CH: 30.9 fps @ 6.25 Gbps
Exposure Time (1 μs step)		1 μs – 60 s		
Partial Scan (Max. Speed)		3968 fps at 4 Lines		
Pixel Data Format	Mono	Mono 8 / Mono 10 / Mono 12		
	Color	BG Bayer 8 / BG Bayer 10 / BG Bayer 12		
Electronic Shutter		Global Shutter		
Exposure Mode		Free-Run, Timed and Trigger Width		
Dynamic Range		64 dB		
Gain Control		1 × ~ 30 × (1/1024 step)		
Black Level Control		0 ~ 256 LSB at 12 bit (1 LSB step)		
Cooling Method		Thermoelectric Peltier Cooling		
Cooling Performance		12°C below ambient temperature – Standard cooling with a fan		
Dimension / Weight		90 mm × 90 mm × 146 mm, 1,400 g		
Temperature		Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C		
Vibration / Shock		3G (20 ~ 200 Hz) XYZ / 10G 6 ms		
Lens Mount		F-mount, Custom mount available upon request		
Power	External	10 ~ 24 V DC, Typ. 24.0 W		
	PoCXP	Not supported		
Compliance		CE, FCC, KC		
API SDK		Viewworks Imaging Solution 7.X		


VP-50MX

50 MEGAPIXEL THERMOELECTRIC PELTIER COOLED CAMERA

Quantum Efficiency Curves

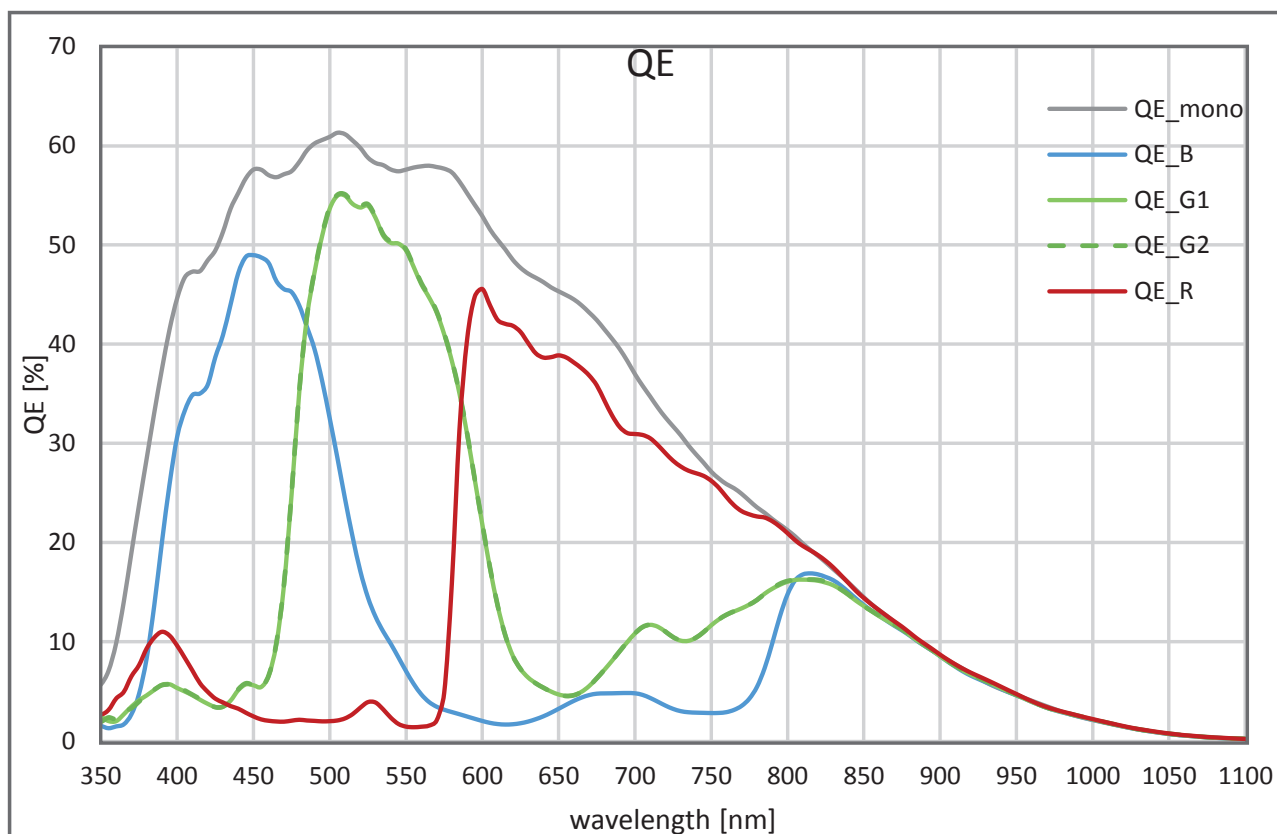


Ordering Scheme

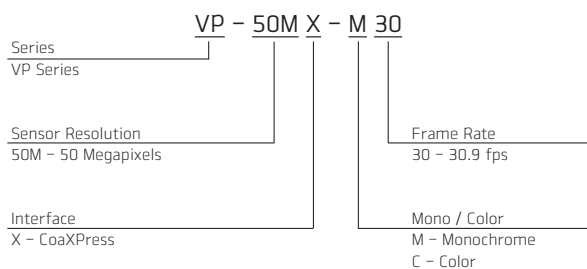


Connector Specification

Power




1 2 3: +12V DC, 4 5 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+, 2: Trigger IN-
3: Strobe Out-(GND), 4: Strobe OUT+
(HR10A-7R-4S)

Data Transfer / Communications



CH1: Master Connection
(75 Ω, DIN 1.0/2.3)


Connectors on camera body

VP-50MX

50 MEGA PIXEL THERMOELECTRIC PELTIER COOLED CAMERA

Mechanical Dimensions

Unit: mm

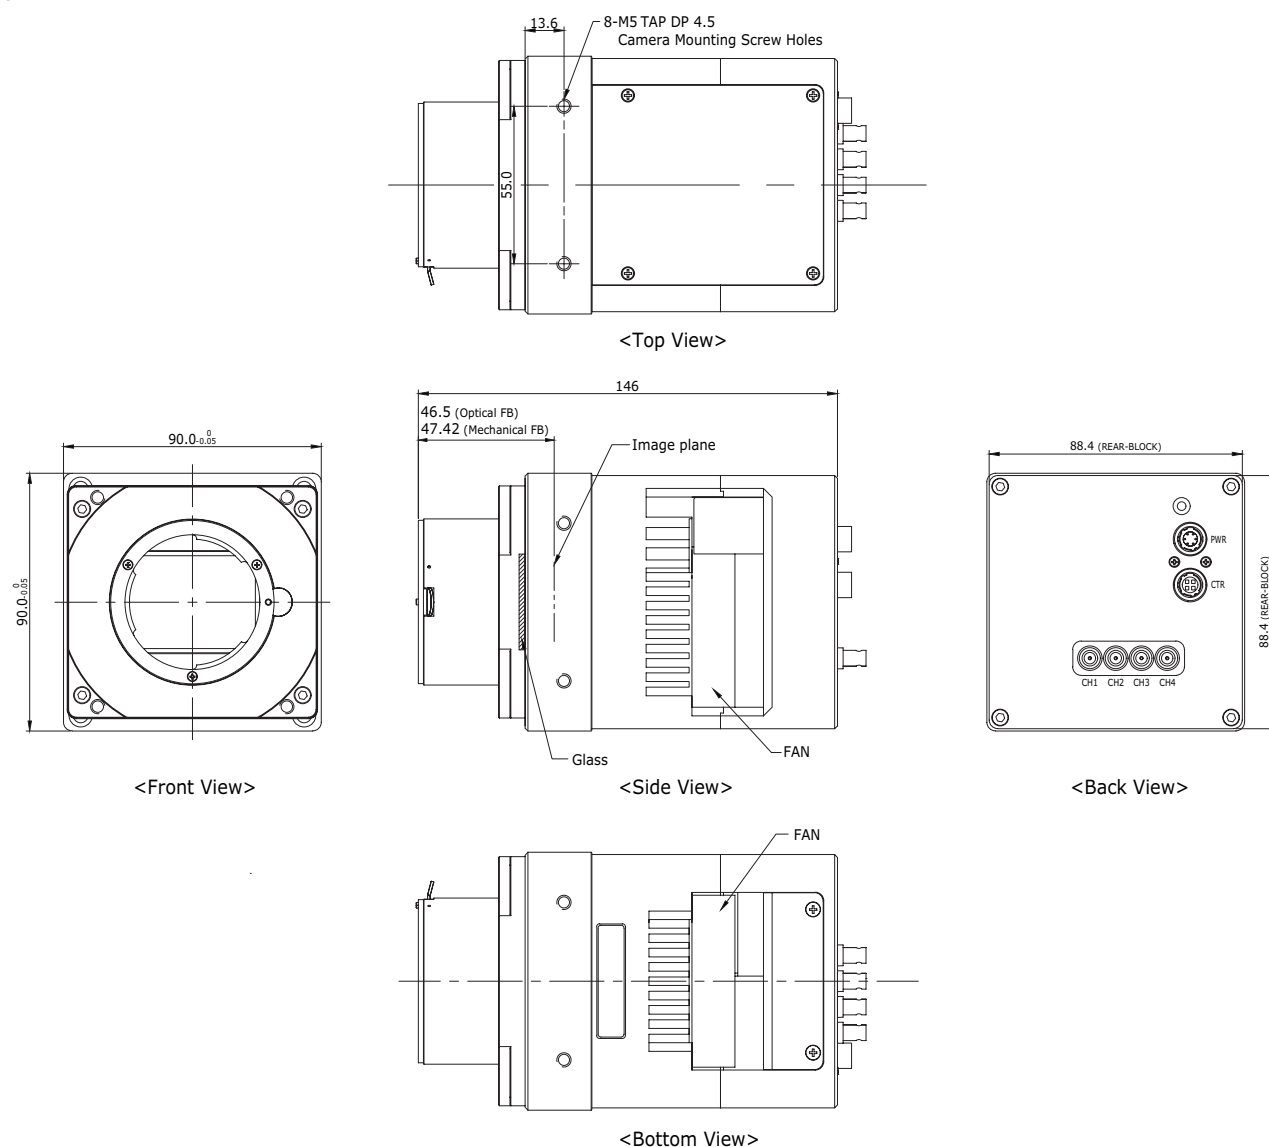

For more information please contact local distributor or visit our website at <http://www.viewworks.com>.

Reproduction in whole or in part without written permission is prohibited. Viewworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

D-17-715

VIEWWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
tel +82-70-7011-6161 fax +82-31-386-8631 e-mail sales@viewworks.com

Please Contact Vision Systems Technology, A Viewworks Master Distributor North America
www.visionsystech.com - 858.449.1562 - sales@visionsystech.com - skype:visionsystech